



APPROVAL SHEET

承 认 书

Product Name Quartz Crystal (Tuning Fork)

P/N _____

Customer's Name _____

Customer's P/N _____

LOT NO. _____

Specification Sheet # _____

Date _____

Draw 陆萍

Check 李坡

Customer Confirmation _____



南京中电熊猫晶体科技有限公司

MANJING CHINA ELECTRONICS PANDA CRYSTAL TECHNOLOGY CORPORATION

TEL:0086-25-85328328


FAX:0086-25-85315213, 85301856

HTTP: www.cecxtal.com

[illegible]

南京中电熊猫晶体科技有限公司 Nanjing CEC Panda Crystal Tech Corp.	Specifications of Tuning Fork 表晶规格书	NO: SHD-0012
	2×1.2 mm SMD表晶	DATE: 2016/9/7

■ 外形及印字(DIMENSION AND MARKING)

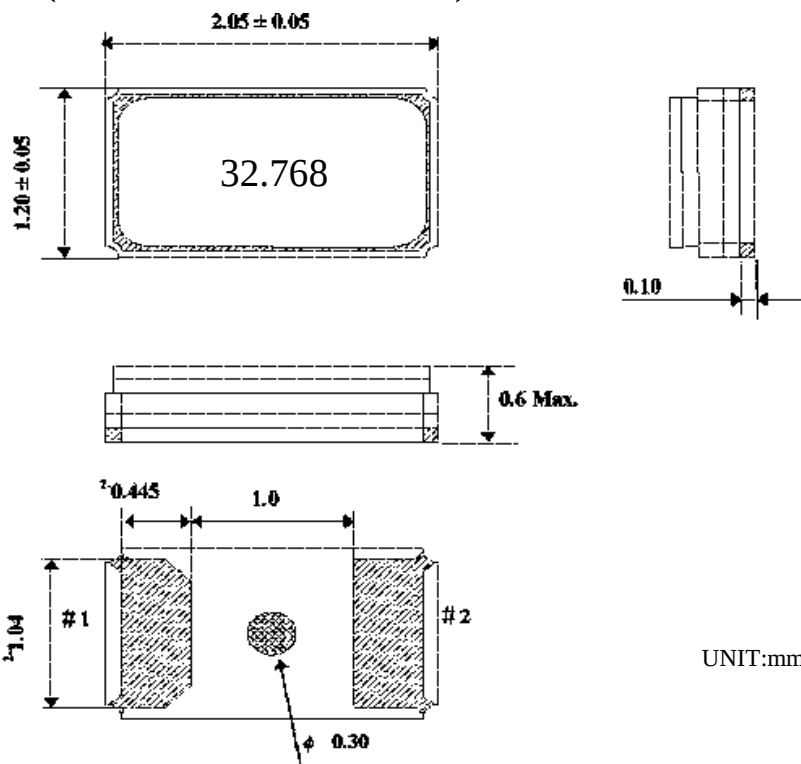

■ 电气参数(ELECTRICAL SPECIFICATION)

Type 型号	2×1.2 mm SMD表晶
Nominal frequency 标称频率	32.768 KHz
Mode of oscillation 振荡模式	XX'-CUT
Operating temperature range 工作温度范围	-40℃ ~ +85 ℃
Storage temperature range 保存温度范围	-40℃ ~ +85 ℃
Drive level 激励电平	1 uW Max.
Loading capacitance 负载电容	12.5 pF/9pF
Frequency tolerance 调整频差	±20 ppm Max.(AT 25℃)
Equivalent resistance 等效阻抗	70 Kohms Max.
Temperature Coefficients 温度系数	-0.04 ppm/℃ ² Max.
Turnover Temperature 变曲温度	25℃±5℃
Shunt capacitance 静电容	/
Motional capacitance 动电容	/
Aging 老化率	±5 ppm/Year Max.
Insulation resistance 绝缘阻抗	≥500 MΩ/DC100V±15 V
Other 其它	Tape & Reel
Note	

南京中电熊猫晶体科技有限公司
Nanjing CEC Panda Crystal Tech Corp.


Specifications of Tuning Fork
表晶规格书

NO: SHD-0012


2×1.2 mm SMD表晶

DATE: 2016/9/7

■编带(TAPE)

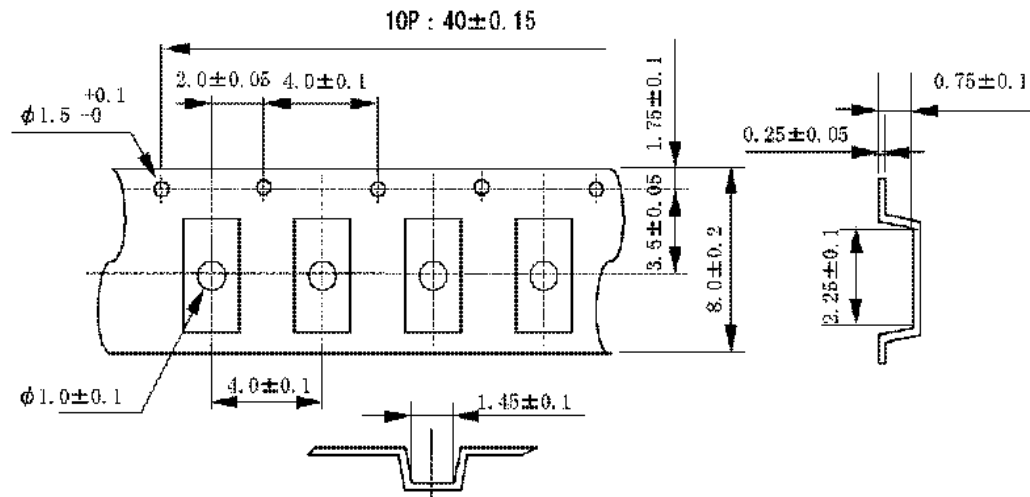

■轮(REEL)

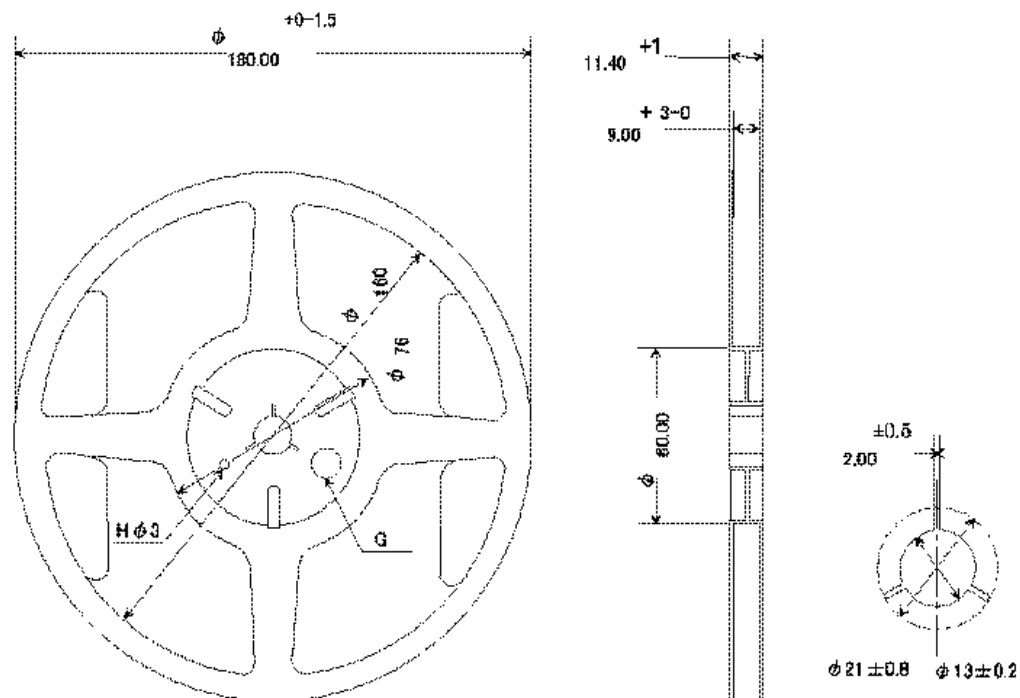

南京中电熊猫晶体科技有限公司
Nanjing CEC Panda Crystal Tech Corp.


Specifications of Tuning Fork
表晶规格书

NO: SHD-0012

2×1.2 mm SMD表晶

DATE: 2016/9/7

■编带方式(TAPING METHOD)

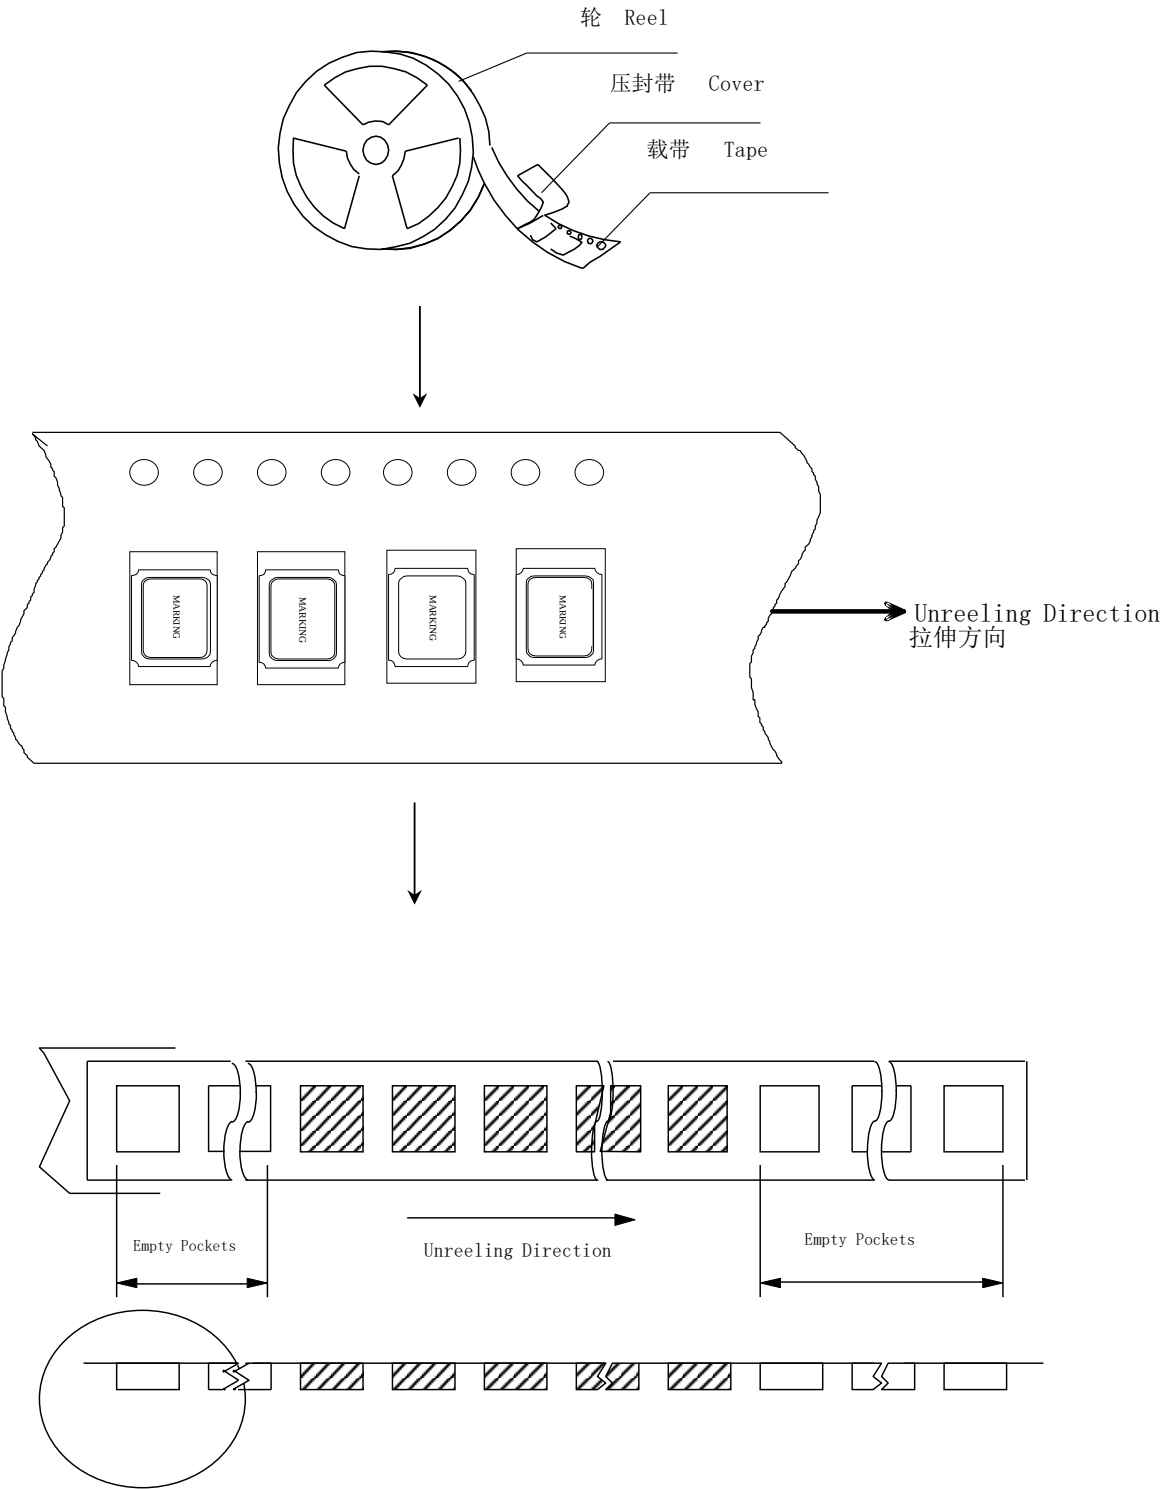


南京中电熊猫晶体科技有限公司 Nanjing CEC Panda Crystal Tech Corp.	Specifications of Tuning Fork 表晶规格书	NO: SHD-0012
	2×1.2 mm SMD表晶	DATE: 2016/9/7

■包装(PACKAGE)

1.自封袋(Bag)

3000只=1 轮

3000 pcs=1 Reel

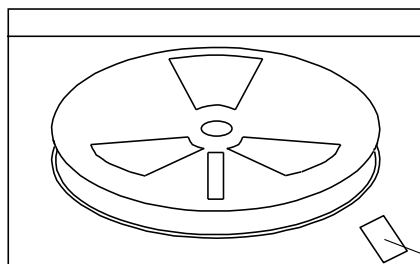


Desiccant 干燥剂

2.内包装(Inside Package)

1 轮=1 盒

1 Reel=1 Box

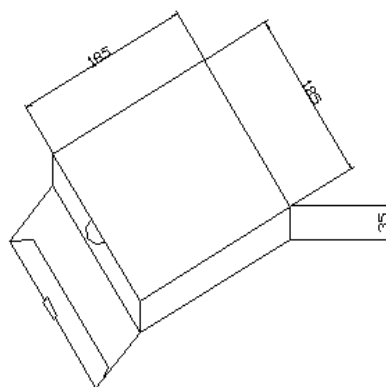

3.外包装(Outside Package)

10 盒=1 箱

10 Box=1 Carton

