

APPROVAL SHEET

承 认 书

Product Name	<u>Quartz Crystal (Tuning Fork)</u>
P/N	<u>HE-32.768K-12.5-20-4085-65K</u>
Customer's Name	<u></u>
Customer's P/N	<u></u>
Lot NO.	<u></u>
Specification Sheet #	<u>SHE-0024</u>
Date	<u>1/25/2016</u>
Generation	<u>陆萍</u>
Approval	<u>李坡</u>
Customer Confirmation	<u></u>



南京中电熊猫晶体科技有限公司

NANJING CHINA ELECTRONICS PANDA CRYSTAL TECHNOLOGY CORPORATION

TEL:0086-25-85328328

FAX:0086-25-85315213, 85301856

HTTP: www.cecxtal.com

[illegible]

南京中电熊猫晶体科技有限公司
Nanjing CEC Panda Crystal Tech Corp.


Specifications of Tuning Fork

NO: SHE-0024

表面贴装表晶

DATE: 2016/1/25

外形及印字(DIMENSION AND MARKING)

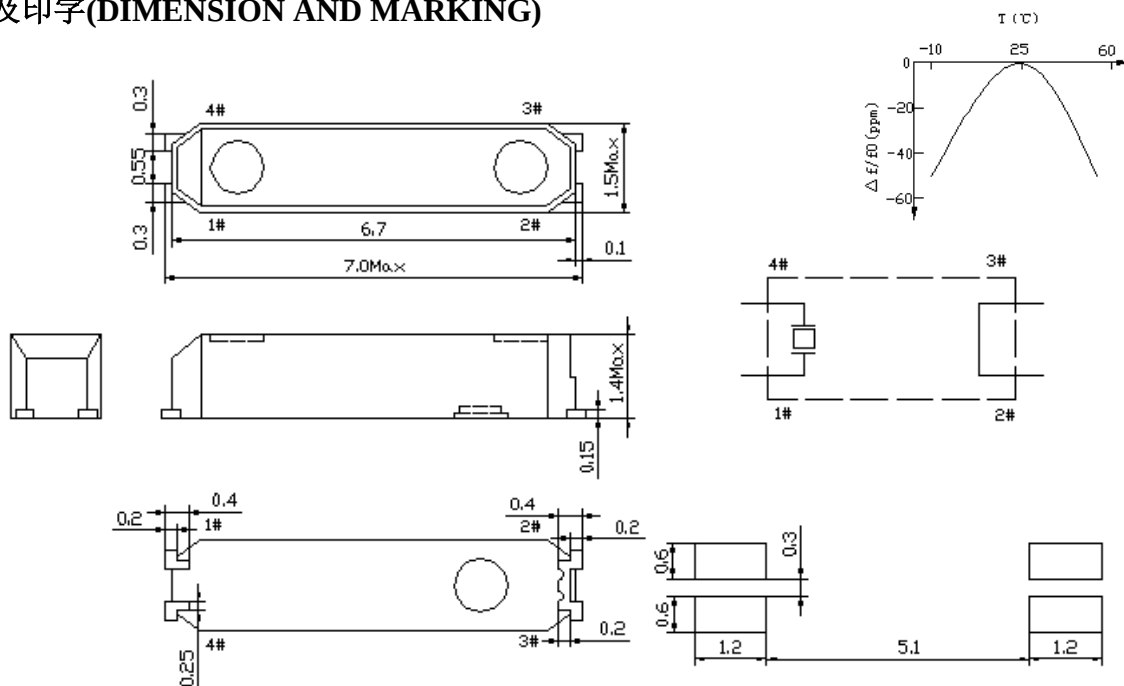


电气参数(ELECTRICAL SPECIFICATION)


Type 型号	Tuning fork 7×1.5mm
Nominal Frequency 标称频率	32.768 KHz
Mode of Oscillation 振荡模式	XY'-Cut
Operating Temperature Range 工作温度范围	-40℃ ~ +85℃
Storage Temperature Range 保存温度范围	-40℃ ~ +85℃
Drive Level 激励电平	1 uW Max.
Loading Capacitance 负载电容	12.5 pF
Frequency Tolerance 调整频差	±20 ppm Max.(AT 25℃)
Equivalent Resistance 等效阻抗	65 Kohms Max.
Temperature Coefficients 温度系数	-0.042 ppm/℃ ² Max.
Turnover Temperature 拐点温度	25℃±5℃
Shunt Capacitance 静电容	/
Motional Capacitance 动电容	/
Aging 老化率	±5 ppm/year Max.
Insulation Resistance 绝缘阻抗	≥500 MΩ/ 100V±15V D.C.
Other 其它	Tape & Reel
Note	

南京中电熊猫晶体科技有限公司 Nanjing CEC Panda Crystal Tech Corp.	Specifications of Tuning Fork	NO: SHE-0024
	表面贴装表晶	DATE: 2016/1/25

■ 编带 (TAPE)

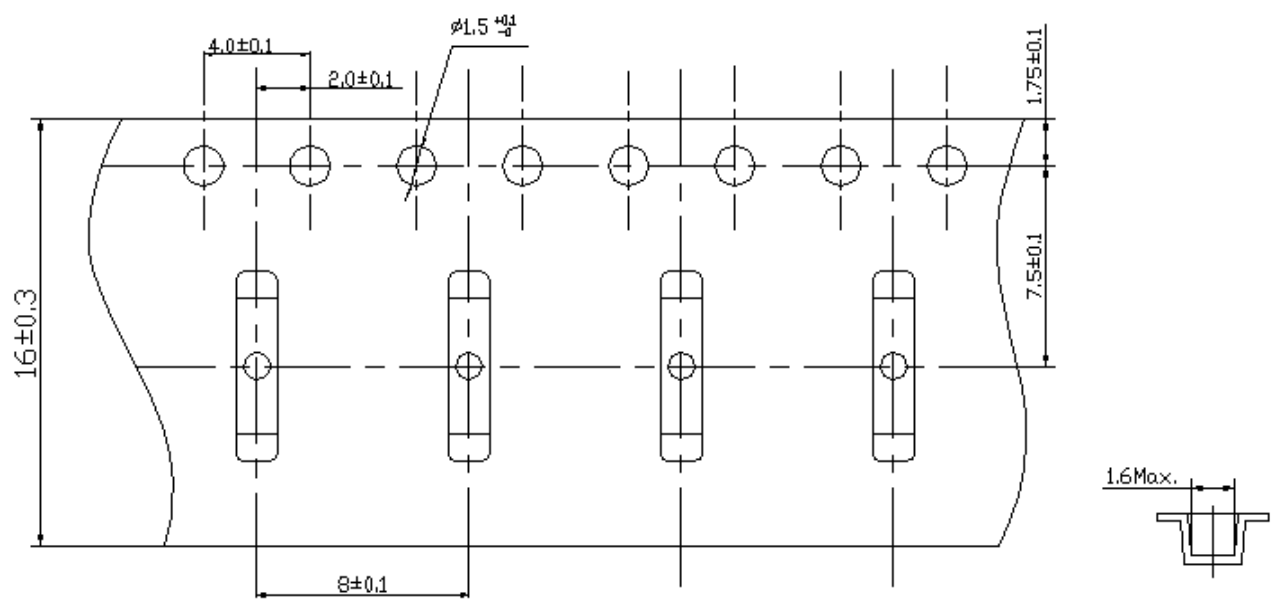

■ 轮 (REEL)

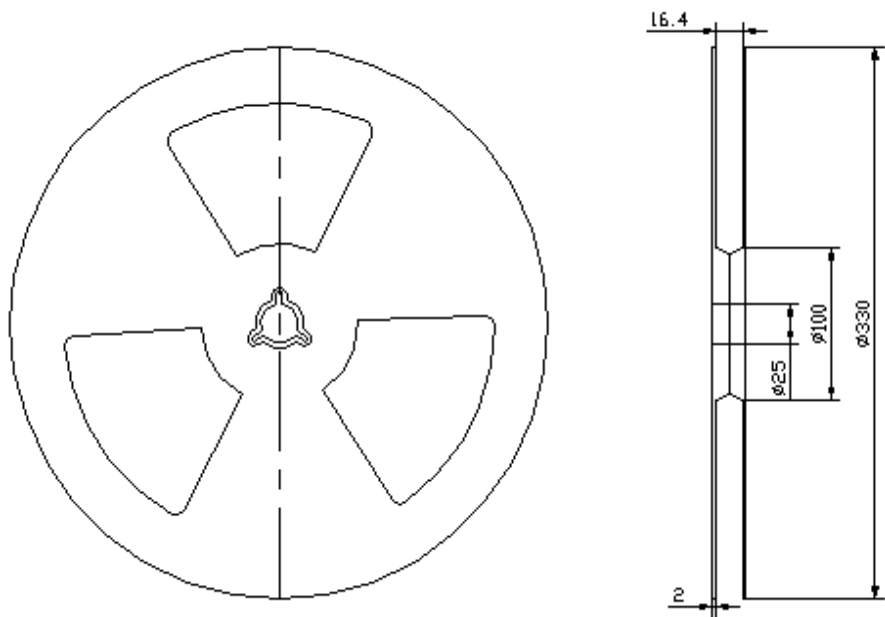

南京中电熊猫晶体科技有限公司
Nanjing CEC Panda Crystal Tech Corp.

Specifications of Tuning Fork


NO: SHE-0024

表面贴装表晶


DATE: 2016/1/25

■包装(PACKAGE)

1. 汽泡膜 Bubble Films
3000 pcs=1 Reel

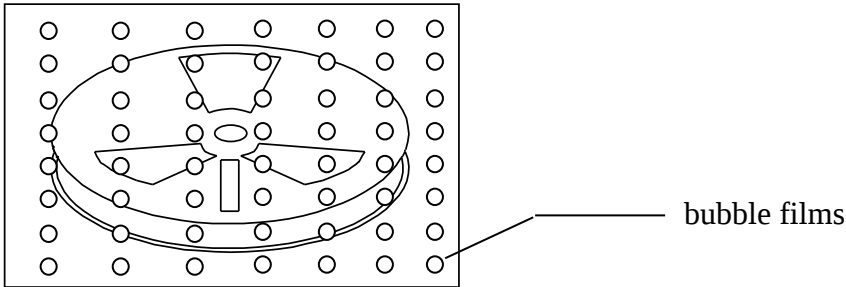

2. 内包装Inside Package
1 Reel=1 Box

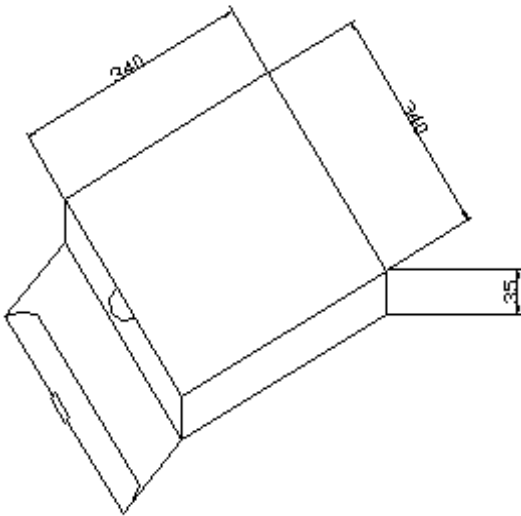

3. 外包装Outside Package
10 Box=1 Carton

